


PUMP MODEL AK-10350-2P

TECHNICAL SPECIFICATION

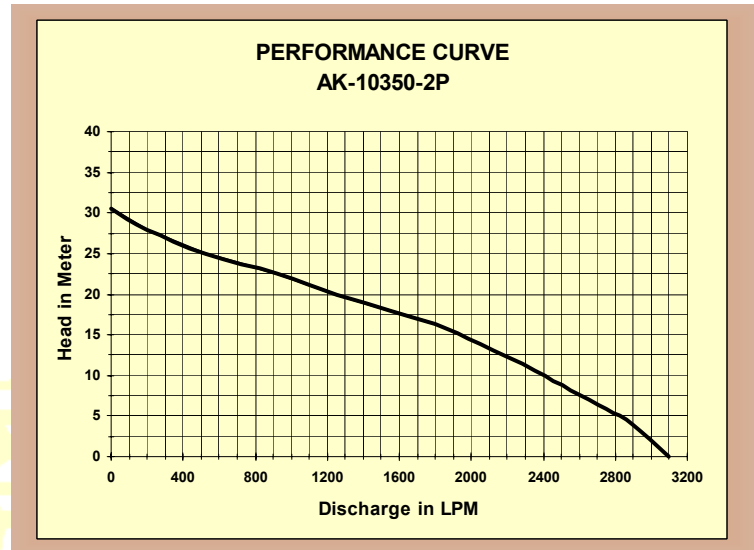

INTRODUCTION:

KPR dewatering submersible pumps, known for job site dependability. Pumps are constructed of strong die cast aluminum and stainless steel body parts; they are fitted with stainless steel hardened impellers and field adjustable nitrile rubber diffuser. The both upper and lower mechanical seals are wholly enclosed in stainless steel oil chamber. These tough pumps do not have to be totally submerged and will operate under snore conditions if necessary.

- ❖ **Model No. :** **AK-10350-2P**
- ❖ **Motor Rating:**
10HP (7.5KW)/3Ø/50Hz/415Volt, 2850 RPM DOL
Start squirrel cage continuous rated induction
motor, insulation Class F (155°C).
- ❖ **Full Load Current:**
16 Amps @ 415 Volt/3Ø/50Hz Ac Supply
- ❖ **Start/Stop:** Max.15 per hour.
- ❖ **Discharge Connection:**
4"Stainless Steel, Hose type.
- ❖ **Power Cable:**
15 meter, Water proof EPR insulated, flexible
power cable of size 4 Core X 4 sq.mm.
*Use rated current when sizing control equipment.

❖ **Mechanical Seal :**

Double mechanical seals (Inner & Outer) in Tandem arrangement. Seal faces are Tungsten Carbide Vs Tungsten Carbide and are wholly enclosed in stainless steel oil chamber.

❖ **Materials:**

Casted Parts	: Aluminum Alloy
Outer Casing/	
Motor Casing	: Stainless Steel
Motor Shaft	: Stainless Steel
Impeller	: Stainless Steel, Hardened (HRC-55)
Fasteners	: Stainless Steel
Oil Chamber	: Stainless Steel
Diffuser	: Nitrile Rubber Coated
Strainer	: Stainless Steel with circular holes of 10mm X 10mm.

- ❖ **Limitations:** Max. Submergence depth-15 Mtr.
Max. Liquid Temperature-40°C.

*These pumps must be used with external motor protection in accordance with technical data.

- ❖ **Weight:** 65.5 KG (Approx) without Cable

(Due to continues product development, Specifications may be subject to change without notice.)